

## TECHNICAL SPECIFICATION

Boiler Model	Vogue Combination				Vogue System					
	26	32	40	15	18	26	32			
Size	Height (mm)	740				740				
	Width (mm)	445				445				
	Depth (mm)	330				330				
Performance	Packaged weight (kg)	40.4	41.7	43.7	37.7	38.0	40.9	41.1		
	Installation weight (kg)	34.8	36.1	38.1	32.6	33	35.8	36.1		
	CH output (kW) Min/Max @ 70°C	18	26	32	15	18	26	32		
	CH output (kW) Min/Max @ 40°C	19.3	27.9	34.3	16.2	19.3	27.9	34.3		
	DHW output (kW) Max	26	32	40	N/A					
	DHW flow rate l/min. 35°C rise	10.6	13.1	16.4	N/A					
	SEDBUK (2005) %	91	91.1	91	91	91.1	91.1	91.1		
	SEDBUK (2009) %	89.1	89.2	89.1	88.9	89.3	89.3	89.3		
Construction	NOx Classification	5				5				
	Adjustable to LPG	TBA				TBA				
	Heat exchanger material	Stainless steel				Stainless steel				
	Burner type	Pre-mix steel with 'Cool burner door'				Pre-mix steel with 'Cool burner door'				
	Fully modulating output	7:1				5:1				
Installation	DHW plate heat exchanger	Yes				N/A				
	Pump & hydroblock	Brass with Modulating pump				Modulating pump				
	Suitable for sealed systems	Yes				Yes				
	Suitable for open-vent systems	No				No				
	Filling loop	Yes				No				
	Pre-wired mains lead	Yes				No				
	In-built system bypass	Yes				Yes				
	In-built condensate trap/siphon	Yes				Yes				
	In-built boiler frost protection	Yes				Yes				
	PRV Wall outlet pipe standard	Yes				Yes				
Clearances	Zero compartment ventilation	Yes				Yes				
	Top (mm) (from top of boiler)	165				165				
	Side (mm)	2.5				2.5				
	Bottom (mm)	100				100				
	Front (mm)	450*				450*				
User Interface	User display	Large backlit LCD with text & symbols				Large backlit LCD with text & symbols				
	User interface	Text display & manual controls				Text display & manual controls				
	Diagnostics	Plain English text				Plain English text				
	User adjustable	Manual heating & hot water controls				Manual heating control				
	Eco setting on CH	Yes				Yes				
	DHW preheat	Yes				N/A				
	Pressure gauge	Analogue in control panel				Analogue in control panel				
	In-built Programmer	Optional (Mech. & electronic)				Optional				
	Pipes	Stand-off kit	Yes				Yes			
		Stand off kit inc. pipes.	Yes				Yes			
Flues	Max horizontal	10	8	8	10	10	10	8		
	Max vertical	10				10				
Connections**	Gas Supply Connection	22mm				22mm				
	CH Flow Connection	22mm				22mm				
	CH Return Connection	22mm				22mm				
	Inlet Connection - DHW	15mm				N/A				
	Outlet Connection - DHW	15mm				N/A				
	Condensate Drain	21.5mm Universal				21.5mm Universal				

\* Can be reduced to 5mm; 450mm required for servicing. \*\* For outputs exceeding 18kW (60,000 Btu/h), 28mm primary pipework will be required.

## CONTROLS & ACCESSORIES

A complete range of accessories are available with all models in the Vogue range to ensure a solution for all installations.

### Vogue C Control Kits:

- Mechanical timer (24 hour) kit
- Electronic timer (7 day) kit
- RF Mech. Programmable Room Thermostat kit
- RF Electronic Programmable Room Thermostat kit
- Weather Compensation kit

### Vogue S Control Kits:

- 2 channel Electronic Programmer kit

### Accessories:

- Stand Off kit
- Stand Off kit (inc. pipes & electrical bonding)
- DHW Expansion Vessel kit
- Condensate pump kit

## IDEAL TRAINING

Vogue training is available at both Leeds and Reading Training Centres of Excellence.

As with all aspects of Vogue, the training course offers a premium experience from start to finish. The one-day course uses a simple step-by-step approach with hands on training to ensure all aspects of commissioning, servicing, and fault finding can be dealt with quickly and efficiently.

### The Vogue training course covers the following:

- Product range overview
- Product specification
- Installation requirements
- Flue and accessory options
- Component overview
- Component change and repair
- User controls
- Sequence of operation
- Fault finding

The course involves discussion with tutors, including demonstrations with practical advice.

To book on a course or for more information please contact the training department on 01482 498432 or email [training@idealboilers.com](mailto:training@idealboilers.com)

## CUSTOMER SERVICE

When you choose Vogue, you can be confident to know the dedicated Vogue help team are on hand to deliver premium levels of customer service seven days a week. For any Vogue customer service queries call 01482 498704 or email [vogue@idealboilers.com](mailto:vogue@idealboilers.com)

# VOGUE

SIMPLY ADVANCED



Ideal Boilers  
PO Box 103  
National Avenue  
Kingston Upon Hull  
HU5 4JN

T: 01482 492251  
[www.idealboilers.com](http://www.idealboilers.com)



# INTRODUCING VOGUE



## EASY TO INSTALL

The Vogue makes installation as simple as possible with a range of unique built in features which are included as standard:

- Automatic bypass
  - Filling loop\*
  - Pre-wired mains lead
  - Pre-formed copper tails at pipe clip distance
  - Universal condensate drain connection
  - Casing clean point
  - Pump & diverter valve exercise & anticycling
  - Boiler frost protection
  - Commissioning function
  - Fault history log & help text
  - Service display with installer tel. no. input
- \*Combi only



The control panel makes installation easier thanks to its easy access to aid with wiring, option of opening positions and optional controls kit location.

- Control panel
- Two opening positions for easier installation & servicing
- Easy access for wiring
- Optional control kit position with controls styled to match



## EASY TO USE

As well as benefits for you, the Vogue also ensures total peace of mind and comfort for the homeowner with a plethora of user friendly features including:

- Simple to use controls with large backlit LCD display
- Preheat on/off
- Economy / high efficiency CH indication
- Readily visible pressure gauge
- Operating status & fault code display
- Wide choice of system control options for control panel
- High quality, stylish casing
- Quiet operation
- Concealed connections and controls
- 7 year warranty

Showcasing unique boiler innovation, the Vogue from Ideal Heating utilises modern technology teamed with premium parts and components to bring you the next step in domestic heating intelligence.

The complete design from component specification, manufacture and build through to consumer use is engineered with quality in mind. All models in the Vogue range deliver premium performance, reliability and value for money.


The Vogue range comprises of combination and system models in a range of outputs:

Vogue combination models  
**26 kW, 32 kW & 40 kW**  
Vogue system models  
**15 kW, 18 kW, 26 kW & 32 kW**

## FEATURES



- Cool door technology
- Modulating pump
- Up to 7:1 modulation
- Large 10 litre expansion vessel
- Large backlit LCD with plain text
- Service display & phone number



- Modulating pump
- Longer maximum flue lengths with easy access sampling points
- Brass waterset including readily accessible parts
- Choice of plug-in controls




- Stylish chassis with full size door complete with damped opening
- Stainless steel heat exchanger



- 7 year parts & labour warranty as standard
- Dedicated customer services helpline
- High flow 40kW Combi
- Comprehensive standard components

## TECHNICAL SPECIFICATION

### Boiler Clearances & Dimensions

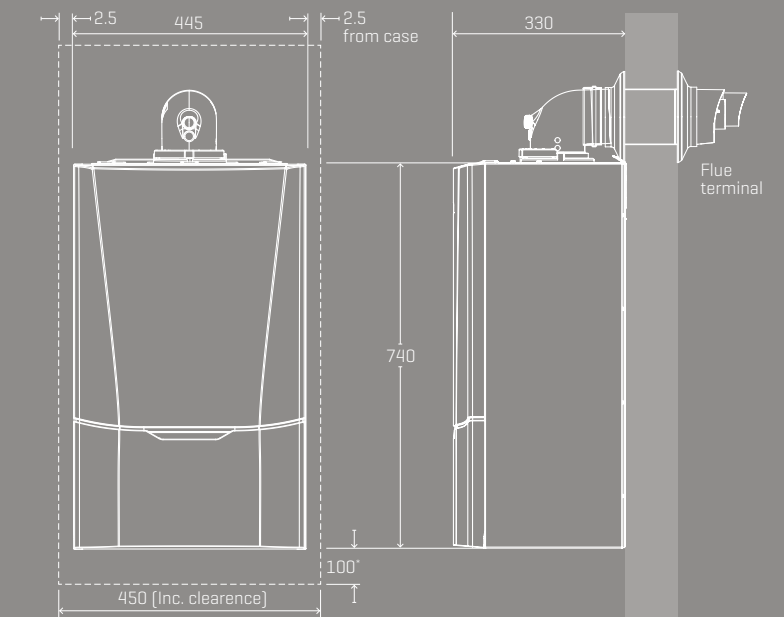

Dimensions applicable to all models.

### Flues

A wide range of the Ideal kits are compatible across all Vogue models to offer a solution suiting all of your flueing needs. To simplify installation and servicing, Vogue flue turrets include a screw fix horse shoe clamp and flue and air sampling points.

- Telescopic B pack
- Horizontal Flue Terminal (600mm long)
- Horizontal Flue Terminal (1000mm long)
- Vertical Connector
- Roof Flue kit
- High Level Flue Outlet kit
- Deflector kit
- Balcony Flue kit
- Raised Horizontal Flue kit
- Extensions, Elbows & Weather Collars

### Flue Lengths

	c26	c32	c40	
Max. Horizontal [m.]	10	8	8	
Max. Vertical [m.]	10			
	s15	s18	s26	s32
Max. Horizontal [m.]	10	10	10	8
Max. Vertical [m.]	10			